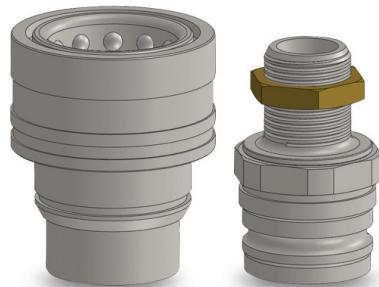




**HYDRAULIC COUPLINGS  
HYDRAULIK KUPPLUNGEN**
**SERIE 074F**
**FLAT-FACE  
AGRICULTURALCOUPLER AGRAR-HYDRAULIK SERIE**

**Couplers and Plugs  
Kupplungen und Nippel**


Connection Anschlüsse ØT	Order No Bestellnr.	L	L1	ØD	Max. Work Press Bar	SW
--------------------------------	------------------------	---	----	----	------------------------	----


**Female Thread Coupler  
Kupplung mit Innengewinde**

M 18x1.5	074F DGBM 18	55	45	220	27
M 20x1.5	074F DGBM 20	55	45	220	27
3/8"	074F DGB 17	55	45	220	27
1/2"	074F DGB 21	55	45	220	27


**Male Thread Plugs  
Nippel mit Außengewinde**

M 18x1.5	074F EUBM 18	51	23	220	32
M 20x1.5	074F EUBM 20	51	23	220	32
1/2"	074F EUB 21	43	15	220	32


**Female Thread Plugs  
Nippel mit Innengewinde**

1/2"	074F DUB 21	51	220	32
------	-------------	----	-----	----

**Interchangeability - Kompatibilität**  
PARKER 5676 serie Hansen - Gromelle Serie 9000

**Temperature Range Temperaturbereich**  
-20°C +100°C (-4°F +212°F)

**Working Pressure - Betriebsdruck**  
Max. 220 bar - 3300 PSI (max.)

**Flow capacity - Nennweite**  
NW Ø8 mm.

**Material - Material**

Main parts made of Steel  
Bichromated - Zinc Plated  
All Highly Stressed component  
Are Hardened  
Seals - Nitrile (Ni) - NBR (Ni)  
Buck-Up Ring - PTFE

